
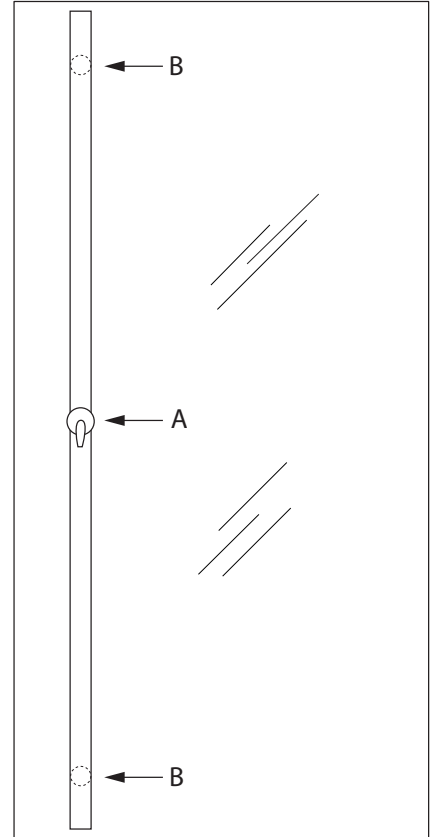


## VP9442-3 FULL HEIGHT LOCKING PULLS TEMPLATE/ORDER FORM

### For All Door Types

- 3/8" to 7/8" thick glass doors
- 1-3/8" to 2-1/2" thick wood or metal doors
- Cylinder must be 34" to 48" above finished floor

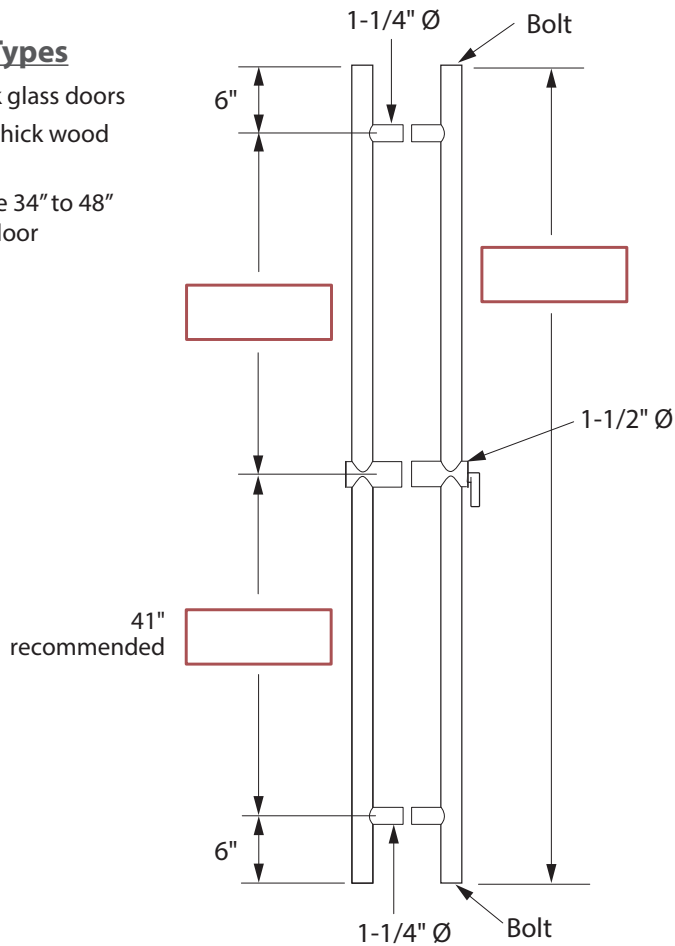

A = 1-3/16" diameter thru hole  
 B = 5/8" diameter hole for glass doors;  
 11/32" diameter hole for wood or metal doors

### Cylinder Options

- RC - Keyed Rim Cylinder; 5 pin Schlage C Keyway
- SFIC - Best style small format housing; less lock
- LFIC - Schlage large format housing; less lock

Quantity	Finish	Cylinder	Strike		DOOR			
			Top	Bottom	Thickness	Size	Clearance	
							Top	Bottom
<b>EXAMPLE</b> 2 Sets	US32D	RC	901	545	1-3/4"	83-1/4"	1/8"	1/8"

Contact: \_\_\_\_\_ Customer: \_\_\_\_\_ PO#: \_\_\_\_\_

Date: \_\_\_\_\_ Approved By: \_\_\_\_\_

**NOTE:** Due to occasional product changes, please ensure your template is current by checking our website at [www.burnsmfg.com](http://www.burnsmfg.com) or call us at 814-833-7428. Burns Mfg is not responsible for obsolete template errors.

**Date: 4/19 - Rev. 3**