
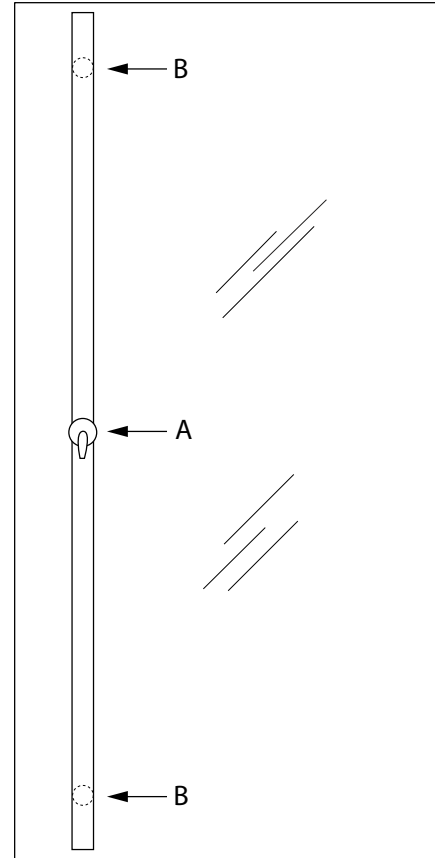


VP9442-3 FULL HEIGHT LOCKING PULLS TEMPLATE/ORDER FORM

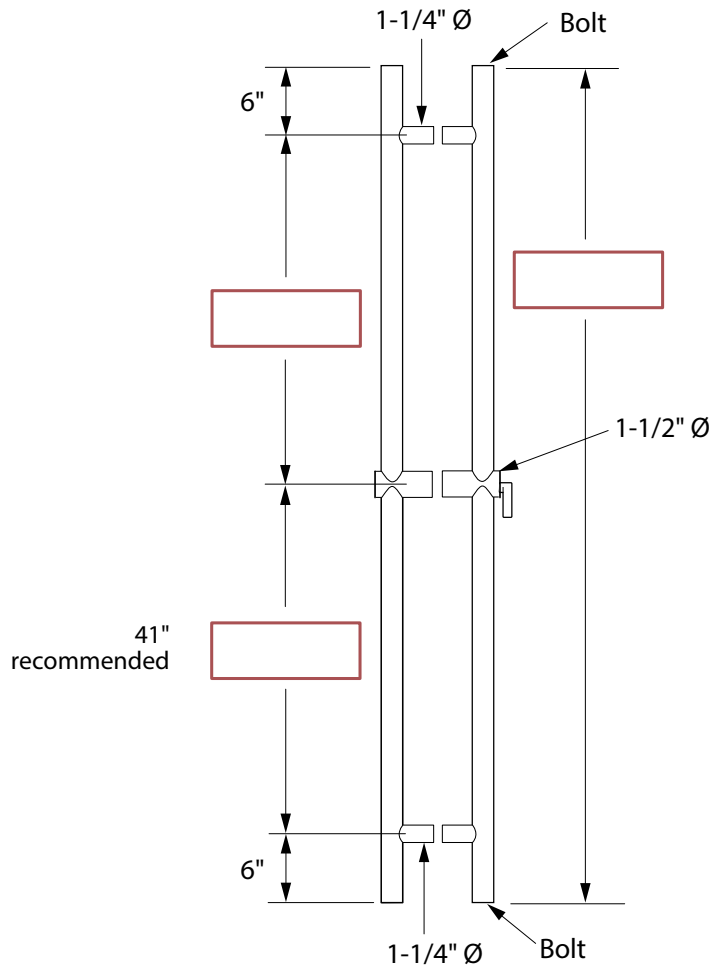

A = 1-3/16" diameter thru hole
 B = 5/8" diameter hole for glass doors;
 11/32" diameter hole for wood or metal doors

For All Door Types

- 3/8" to 7/8" thick glass doors
- 1-3/8" to 2-1/2" thick wood or metal doors
- Cylinder must be 34" to 48" above finished floor

Quantity	Finish	Cylinder	Strike		DOOR			
			Top	Bottom	Thickness	Size	Clearance	
							Top	Bottom
EXAMPLE 2	US32D	RC	901	545	1-3/4"	83-1/4"	1/8"	1/8"

Contact: _____ **Customer:** _____ **PO#:** _____

Date: _____ **Approved By:** _____

NOTE: Due to occasional product changes, please ensure your template is current by checking our website at www.burnsmfg.com or call us at 814-833-7428. Burns Mfg is not responsible for obsolete template errors.

Date: 4/18 - Rev. 2