



VP9842-2 HORIZONTAL LOCKING PUSH/PULL TEMPLATE/ORDER FORM

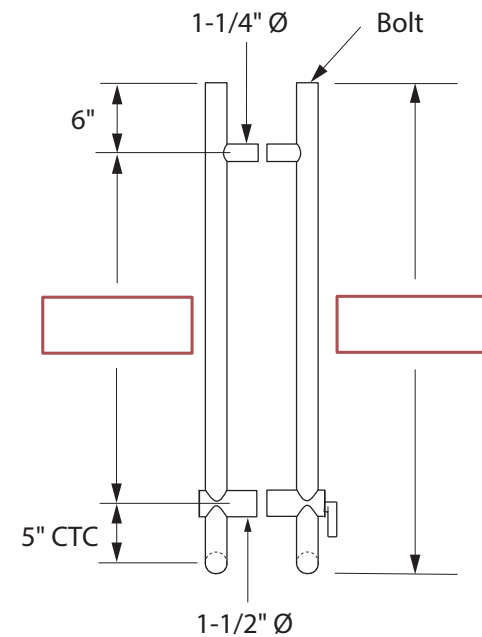

Left Hand Shown

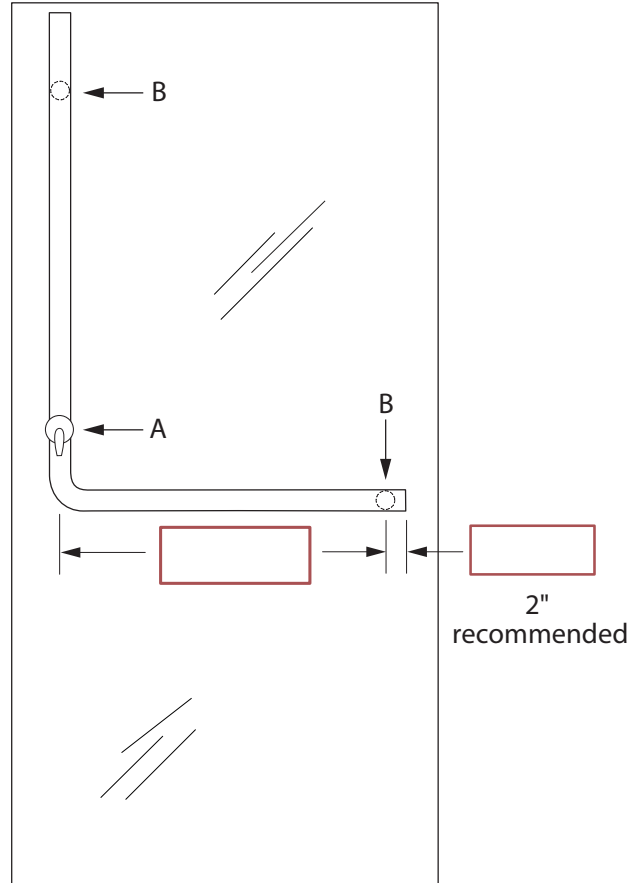

A = 1-3/16" diameter thru hole
 B = 5/8" diameter hole for glass doors;
 11/32" diameter hole for wood or metal doors

For All Door Types

- 3/8" to 7/8" thick glass doors
- 1-3/8" to 2-1/2" thick wood or metal doors
- Cylinder must be 34" to 48" above finished floor

Cylinder Options

RC - Keyed Rim Cylinder; 5 pin Schlage C Keyway
 SFIC - Best style small format housing; less lock
 LFIC - Schlage large format housing; less lock

Quantity	Finish	Cylinder	Strike	Handing	DOOR		
					Thickness	Size	Clearance
EXAMPLE 2 Sets	US32D	RC	903	Left Hand	1-3/4"	83-1/4"	1/8" Bottom

Contact: _____ Customer: _____ PO#: _____

Date: _____ Approved By: _____

NOTE: Due to occasional product changes, please ensure your template is current by checking our website at www.burnsmfg.com or call us at 814-833-7428. Burns Mfg is not responsible for obsolete template errors.

Date: 4/19 - Rev. 3